

# AIRMAC

Premium Quality

Reciprocating  
Air Compressors

## Reciprocating Air Compressors



Domestic, trade and small industrial users can choose from ten models in the 240 Volt range. With two or four-wheel mounted, stationary and twin-pump variants, there's an Airmac compressor to suit every application.


**V13 240V**
**V13-H 240V**
**T17 240V**

<b>Motor Power</b>	1.65 kW (2.2 hp)	1.65 kW (2.2 hp)	2.2 kW (3 hp)
<b>Pump Displacement</b>	285 L/min (10.1 cfm)	285 L/min (10.1 cfm)	390 L/min (13.8 cfm)
<b>Free Air Delivery</b>	185 L/min (6.5 cfm)	185 L/min (6.5 cfm)	280 L/min (9.9 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
<b>Tank Volume</b>	60 Litres	60 Litres	70 Litres
<b>Pump Model</b>	Fusheng VA-65	Fusheng VA-65	Fusheng TA-65
<b>Pump Speed</b>	975 rpm	975 rpm	815 rpm
<b>Electricity Supply</b>	10 Amps	10 Amps	15 Amps
<b>Product Code</b>	AM V13 240V	AM V13-H 240V	AM T17 240V


**T17-H 240V**
**T20-H 240V**
**HT20 240V 175psi**

<b>Motor Power</b>	2.2 kW (3 hp)	2.4 kW (3.2 hp)	2.4 kW (3.2 hp)
<b>Pump Displacement</b>	390 L/min (13.8 cfm)	475 L/min (16.8 cfm)	320 L/min (11.3 cfm)
<b>Free Air Delivery</b>	280 L/min (9.9 cfm)	310 L/min (11 cfm)	260 L/min (9.2 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,200 kPa (175 psi)
<b>Tank Volume</b>	70 Litres	70 Litres	70 Litres
<b>Pump Model</b>	Fusheng TA-65	Fusheng TA-65	Fusheng HTA-65
<b>Pump Speed</b>	815 rpm	990 rpm	995 rpm
<b>Electricity Supply</b>	15 Amps	15 Amps	15 Amps
<b>Product Code</b>	AM T17-H 240V	AM T20-H 240V	AM HT20 240V


**T20LG 240V**
**T20 240V**
**T20-120L 240V**

<b>Motor Power</b>	2.4 kW (3.2 hp)	2.4 kW (3.2 hp)	2.4 kW (3.2 hp)
<b>Pump Displacement</b>	390 L/min (13.8 cfm)	475 L/min (16.8 cfm)	475 L/min (16.8 cfm)
<b>Free Air Delivery</b>	280 L/min (9.9 cfm)	310 L/min (11 cfm)	310 L/min (11 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
<b>Tank Volume</b>	100 Litres	100 Litres	120 Litres
<b>Pump Model</b>	Fusheng TA-65	Fusheng TA-65	Fusheng TA-65
<b>Pump Speed</b>	815 rpm	990 rpm	990 rpm
<b>Electricity Supply</b>	15 Amps	15 Amps	15 Amps
<b>Product Code</b>	AM T20LG 240V	AM T20 240V	AM T20-120L 240V


**TT40 240V**

<b>Motor Power</b>	2 x 2.4 kW (2 x 3.2 hp)
<b>Pump Displacement</b>	780 L/min (27.6 cfm)
<b>Free Air Delivery</b>	560 L/min (19.8 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)
<b>Tank Volume</b>	190 Litres
<b>Pump Model</b>	Fusheng TA-65
<b>Pump Speed</b>	815 rpm
<b>Electricity Supply</b>	2 x 15 Amps
<b>Product Code</b>	AM TT40 240V

Airmac's 415 Volt series is the best choice for industrial users who need a safe and reliable heavy-duty compressor for their factory or workshop. Every model offers a superb combination of unique features and high performance.



**T20 415V**

**HT20 415V**

**B23 415V**

<b>Motor Power</b>	2.2 kW (3 hp)	2.2 kW (3 hp)	3 kW (4 hp)
<b>Pump Displacement</b>	475 L/min (16.8 cfm)	320 L/min (11.3 cfm)	390 L/min (13.8 cfm)
<b>Free Air Delivery</b>	310 L/min (11.0 cfm)	260 L/min (9.2 cfm)	325 L/min (11.5 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)	1,200 kPa (175 psi)	1,200 kPa (175 psi)
<b>Tank Volume</b>	100 Litres	100 Litres	125 Litres
<b>Pump Model</b>	Fusheng TA-65	Fusheng HTA-65	Fusheng B-1
<b>Pump Speed</b>	990 rpm	995 rpm	960 rpm
<b>Current Draw</b>	4.8 Amps	4.8 Amps	6.4 Amps
<b>Product Code</b>	AM T20 415V	AM HT20 415V	AM B23 415V



**V25 415V**

**B29 415V**

**T30 415V**

<b>Motor Power</b>	3 kW (4 hp)	4 kW (5.5 hp)	4 kW (5.5 hp)
<b>Pump Displacement</b>	600 L/min (21.2 cfm)	645 L/min (22.8 cfm)	800 L/min (28.3 cfm)
<b>Free Air Delivery</b>	465 L/min (16.4 cfm)	555 L/min (19.6 cfm)	620 L/min (21.9 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)	1,200 kPa (175 psi)	1,000 kPa (145 psi)
<b>Tank Volume</b>	125 Litres	150 Litres	150 Litres
<b>Pump Model</b>	Fusheng VA-80	Fusheng B-2	Fusheng TA-80
<b>Pump Speed</b>	995 rpm	950 rpm	885 rpm
<b>Current Draw</b>	6.4 Amps	8.3 Amps	8.3 Amps
<b>Product Code</b>	AM V25 415V	AM B29 415V	AM T30 415V



**V40 415V**



**B52 415V**



**T55 415V**

<b>Motor Power</b>	5.5 kW (7.5 hp)	7.5 kW (10 hp)	7.5 kW (10 hp)
<b>Pump Displacement</b>	1,060 L/min (37.5 cfm)	1,165 L/min (41.2 cfm)	1,510 L/min (53.4 cfm)
<b>Free Air Delivery</b>	825 L/min (29.2 cfm)	1,050 L/min (37.1 cfm)	1,245 L/min (44.0 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)	1,200 kPa (175 psi)	1,000 kPa (145 psi)
<b>Tank Volume</b>	250 Litres	300 Litres	300 Litres
<b>Pump Model</b>	Fusheng VA-100	Fusheng B-3	Fusheng TA-100
<b>Pump Speed</b>	965 rpm	860 rpm	915 rpm
<b>Current Draw</b>	12.2 Amps	16.1 Amps	16.1 Amps
<b>Product Code</b>	AM V40 415V	AM B52 415V	AM T55 415V



**T75 415V**

<b>Motor Power</b>	11 kW (15 hp)
<b>Pump Displacement</b>	2,105 L/min (74.4 cfm)
<b>Free Air Delivery</b>	1,750 L/min (61.8 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)
<b>Tank Volume</b>	400 Litres
<b>Pump Model</b>	Fusheng TA-120
<b>Pump Speed</b>	775 rpm
<b>Current Draw</b>	23.0 Amps
<b>Product Code</b>	AM T75 415V

No electricity? No problem. Airmac's market-leading range of Honda petrol engine-powered compressors is ideal for use out in the field. The genuine Honda GX Series engines perfectly complement these superior portable units.

POWERED by  
**HONDA**



**V16P**

**V16P-H**

**T20P**

<b>Honda Engine</b>	6.5 hp GX200	6.5 hp GX200	6.5 hp GX200
<b>Starter</b>	Rope Pull	Rope Pull	Rope Pull
<b>Pump Displacement</b>	300 L/min (10.6 cfm)	300 L/min (10.6 cfm)	490 L/min (17.3 cfm)
<b>Free Air Delivery</b>	195 L/min (6.9 cfm)	195 L/min (6.9 cfm)	320 L/min (11.3 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
<b>Tank Volume</b>	60 Litres	60 Litres	70 Litres
<b>Pump Model</b>	Fusheng VA-65	Fusheng VA-65	Fusheng TA-65
<b>Pump Speed</b>	1,025 rpm	1,025 rpm	1,025 rpm
<b>Product Code</b>	AM V16P	AM V16P-H	AM T20P

POWERED by  
**HONDA**



**T20P ES**

**T20P-H**

**T20P-H ES**

<b>Honda Engine</b>	6.5 hp GX200	6.5 hp GX200	6.5 hp GX200
<b>Starter</b>	Key Electric & Rope Pull	Rope Pull	Key Electric & Rope Pull
<b>Pump Displacement</b>	490 L/min (17.3 cfm)	490 L/min (17.3 cfm)	490 L/min (17.3 cfm)
<b>Free Air Delivery</b>	320 L/min (11.3 cfm)	320 L/min (11.3 cfm)	320 L/min (11.3 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
<b>Tank Volume</b>	70 Litres	70 Litres	70 Litres
<b>Pump Model</b>	Fusheng TA-65	Fusheng TA-65	Fusheng TA-65
<b>Pump Speed</b>	1,025 rpm	1,025 rpm	1,025 rpm
<b>Product Code</b>	AM T20P ES	AM T20P-H	AM T20P-H ES

POWERED by  
**HONDA**




**T20P-100L**

**T20P-100L ES**

**HT20P-H 175psi**

<b>Honda Engine</b>	6.5 hp GX200	6.5 hp GX200	6.5 hp GX200
<b>Starter</b>	Rope Pull	Key Electric & Rope Pull	Rope Pull
<b>Pump Displacement</b>	490 L/min (17.3 cfm)	490 L/min (17.3 cfm)	330 L/min (11.7 cfm)
<b>Free Air Delivery</b>	320 L/min (11.3 cfm)	320 L/min (11.3 cfm)	265 L/min (9.4 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,200 kPa (175 psi)
<b>Tank Volume</b>	100 Litres	100 Litres	70 Litres
<b>Pump Model</b>	Fusheng TA-65	Fusheng TA-65	Fusheng HTA-65
<b>Pump Speed</b>	1,025 rpm	1,025 rpm	1,030 rpm
<b>Product Code</b>	AM T20P-100L	AM T20P-100L ES	AM HT20P-H

POWERED by  
**HONDA**




**HT20P-H ES 175psi**

**T20P-120L**

**T20P-120L ES**

<b>Honda Engine</b>	6.5 hp GX200	6.5 hp GX200	6.5 hp GX200
<b>Starter</b>	Key Electric & Rope Pull	Rope Pull	Key Electric & Rope Pull
<b>Pump Displacement</b>	330 L/min (11.7 cfm)	490 L/min (17.3 cfm)	490 L/min (17.3 cfm)
<b>Free Air Delivery</b>	265 L/min (9.4 cfm)	320 L/min (11.3 cfm)	320 L/min (11.3 cfm)
<b>Maximum Pressure</b>	1,200 kPa (175 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
<b>Tank Volume</b>	70 Litres	120 Litres	120 Litres
<b>Pump Model</b>	Fusheng HTA-65	Fusheng TA-65	Fusheng TA-65
<b>Pump Speed</b>	1,030 rpm	1,025 rpm	1,025 rpm
<b>Product Code</b>	AM HT20P-H ES	AM T20P-120L	AM T20P-120L ES

POWERED by  
**HONDA**



**V25P**

**V25P ES**

**B24P 175psi**

<b>Honda Engine</b>	9 hp GX270	9 hp GX270	9 hp GX270
<b>Starter</b>	Rope Pull	Key Electric & Rope Pull	Rope Pull
<b>Pump Displacement</b>	635 L/min (22.4 cfm)	635 L/min (22.4 cfm)	565 L/min (20.0 cfm)
<b>Free Air Delivery</b>	485 L/min (17.1 cfm)	485 L/min (17.1 cfm)	470 L/min (16.6 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,200 kPa (175 psi)
<b>Tank Volume</b>	125 Litres	125 Litres	100 Litres
<b>Pump Model</b>	Fusheng VA-80	Fusheng VA-80	Fusheng B-1
<b>Pump Speed</b>	1,055 rpm	1,055 rpm	1,385 rpm
<b>Product Code</b>	AM V25P	AM V25P ES	AM B24P

POWERED by  
**HONDA**



**B24P ES 175psi**

**T30P**

**T30P ES**

<b>Honda Engine</b>	9 hp GX270	9 hp GX270	9 hp GX270
<b>Starter</b>	Key Electric & Rope Pull	Rope Pull	Key Electric & Rope Pull
<b>Pump Displacement</b>	565 L/min (20.0 cfm)	880 L/min (31.1 cfm)	880 L/min (31.1 cfm)
<b>Free Air Delivery</b>	470 L/min (16.6 cfm)	680 L/min (24.0 cfm)	680 L/min (24.0 cfm)
<b>Maximum Pressure</b>	1,200 kPa (175 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
<b>Tank Volume</b>	100 Litres	125 Litres	125 Litres
<b>Pump Model</b>	Fusheng B-1	Fusheng TA-80	Fusheng TA-80
<b>Pump Speed</b>	1,385 rpm	970 rpm	970 rpm
<b>Product Code</b>	AM B24P ES	AM T30P	AM T30P ES



POWERED by  
**HONDA**



**B35P ES 175psi**

**V40P ES**

**T55P ES**

<b>Honda Engine</b>	13 hp GX390	13 hp GX390	13 hp GX390
<b>Starter</b>	Key Electric & Rope Pull	Key Electric & Rope Pull	Key Electric & Rope Pull
<b>Pump Displacement</b>	945 L/min (33.4 cfm)	1,105 L/min (39.0 cfm)	1,485 L/min (52.5 cfm)
<b>Free Air Delivery</b>	815 L/min (28.8 cfm)	850 L/min (30.0 cfm)	1,225 L/min (43.3 cfm)
<b>Maximum Pressure</b>	1,200 kPa (175 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
<b>Tank Volume</b>	120 Litres	150 Litres	150 Litres
<b>Pump Model</b>	Fusheng B-2	Fusheng VA-100	Fusheng TA-100
<b>Pump Speed</b>	1,400 rpm	1,005 rpm	900 rpm
<b>Product Code</b>	AM B35P ES	AM V40P ES	AM T55P ES

The Yanmar diesel engine-powered range of Airmar compressors is the preferred choice at mine sites, oil and gas facilities, and other hazardous workplaces where safety, reliability and fuel economy are paramount.



**T20D**

**T20D ES**

**HT20D 175psi**

<b>Yanmar Engine</b>	4.7 hp L48	4.7 hp L48	4.7 hp L48
<b>Starter</b>	Rope Pull	Key Electric & Rope Pull	Rope Pull
<b>Emergency Stop</b>	Not Available	Push Button	Not Available
<b>Pump Displacement</b>	490 L/min (17.3 cfm)	490 L/min (17.3 cfm)	330 L/min (11.7 cfm)
<b>Free Air Delivery</b>	320 L/min (11.3 cfm)	320 L/min (11.3 cfm)	265 L/min (9.4 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,200 kPa (175 psi)
<b>Tank Volume</b>	70 Litres	70 Litres	70 Litres
<b>Pump Model</b>	Fusheng TA-65	Fusheng TA-65	Fusheng HTA-65
<b>Product Code</b>	AM T20D	AM T20D ES	AM HT20D



**HT20D ES 175psi**

**B24D ES 175psi**

**T30D ES**

<b>Yanmar Engine</b>	4.7 hp L48	6.7 hp L70	6.7 hp L70
<b>Starter</b>	Key Electric & Rope Pull	Key Electric & Rope Pull	Key Electric & Rope Pull
<b>Emergency Stop</b>	Push Button	Push Button	Push Button
<b>Pump Displacement</b>	330 L/min (11.7 cfm)	565 L/min (20.0 cfm)	880 L/min (31.1 cfm)
<b>Free Air Delivery</b>	265 L/min (9.4 cfm)	470 L/min (16.6 cfm)	680 L/min (24.0 cfm)
<b>Maximum Pressure</b>	1,200 kPa (175 psi)	1,200 kPa (175 psi)	1,000 kPa (145 psi)
<b>Tank Volume</b>	70 Litres	100 Litres	125 Litres
<b>Pump Model</b>	Fusheng HTA-65	Fusheng B-1	Fusheng TA-80
<b>Product Code</b>	AM HT20D ES	AM B24D ES	AM T30D ES


**B35D ES 175psi**
**V40D ES**

<b>Yanmar Engine</b>	10 hp L100	10 hp L100
<b>Starter</b>	Key Electric & Rope Pull	Key Electric & Rope Pull
<b>Emergency Stop</b>	Push Button	Push Button
<b>Pump Displacement</b>	945 L/min (33.4 cfm)	1,105 L/min (39.0 cfm)
<b>Free Air Delivery</b>	815 L/min (28.8 cfm)	850 L/min (30.0 cfm)
<b>Maximum Pressure</b>	1,200 kPa (175 psi)	1,000 kPa (145 psi)
<b>Tank Volume</b>	120 Litres	150 Litres
<b>Pump Model</b>	Fusheng B-2	Fusheng VA-100
<b>Product Code</b>	AM B35D ES	AM V40D ES

Some applications are not amenable to using conventional tank-mounted compressors. In response, Airmac has developed the truly innovative Multi-Function Series that features different form factors and user-configurable layouts.



### V13 MFC 240V

<b>Motor Power</b>	1.65 kW (2.2 hp)
<b>Pump Displacement</b>	285 L/min (10.1 cfm)
<b>Free Air Delivery</b>	185 L/min (6.5 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)
<b>Tank Volume</b>	40 Litres
<b>Pump Model</b>	Fusheng VA-65
<b>Pump Speed</b>	975 rpm
<b>Electricity Supply</b>	10 Amps
<b>Product Code</b>	AM V13 MFC 240V



### T20P MFC

### T20P MFC ES

<b>Honda Engine</b>	6.5 hp GX200	6.5 hp GX200
<b>Starter</b>	Rope Pull	Key Electric & Rope Pull
<b>Pump Displacement</b>	490 L/min (17.3 cfm)	490 L/min (17.3 cfm)
<b>Free Air Delivery</b>	320 L/min (11.3 cfm)	320 L/min (11.3 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)	1,000 kPa (145 psi)
<b>Tank Volume</b>	60 Litres	60 Litres
<b>Pump Model</b>	Fusheng TA-65	Fusheng TA-65
<b>Pump Speed</b>	1,025 rpm	1,025 rpm
<b>Product Code</b>	AM T20P MFC	AM T20P MFC ES



	<b>T20D MFC</b>	<b>T20D MFC ES</b>
<b>Yanmar Engine</b>	4.7 hp L48	4.7 hp L48
<b>Starter</b>	Rope Pull	Key Electric & Rope Pull
<b>Emergency Stop</b>	Not Available	Push Button
<b>Pump Displacement</b>	490 L/min (17.3 cfm)	490 L/min (17.3 cfm)
<b>Free Air Delivery</b>	320 L/min (11.3 cfm)	320 L/min (11.3 cfm)
<b>Maximum Pressure</b>	1,000 kPa (145 psi)	1,000 kPa (145 psi)
<b>Tank Volume</b>	60 Litres	60 Litres
<b>Pump Model</b>	Fusheng TA-65	Fusheng TA-65
<b>Product Code</b>	AM T20D MFC	AM T20D MFC ES

Airmac 415 Volt oil free compressors are used in special applications such as breathing air, food processing and pharmaceutical production. They are a very dependable and economical source of uncontaminated compressed air.




**V30-OF 415V**

**T40-OF 415V**

**T55-OF 415V**

<b>Motor Power</b>	4 kW (5.5 hp)	5.5 kW (7.5 hp)	7.5 kW (10 hp)
<b>Pump Displacement</b>	770 L/min (27.2 cfm)	880 L/min (31.1 cfm)	1,085 L/min (38.3 cfm)
<b>Free Air Delivery</b>	510 L/min (18.0 cfm)	690 L/min (24.4 cfm)	900 L/min (31.8 cfm)
<b>Maximum Pressure</b>	870 kPa (126 psi)	870 kPa (126 psi)	870 kPa (126 psi)
<b>Tank Volume</b>	150 Litres	250 Litres	300 Litres
<b>Pump Model</b>	Fusheng VW-50	Fusheng TW-75	Fusheng TW-100
<b>Pump Speed</b>	700 rpm	745 rpm	580 rpm
<b>Current Draw</b>	9.3 Amps	12.2 Amps	16.1 Amps
<b>Product Code</b>	AM V30-OF 415V	AM T40-OF 415V	AM T55-OF 415V

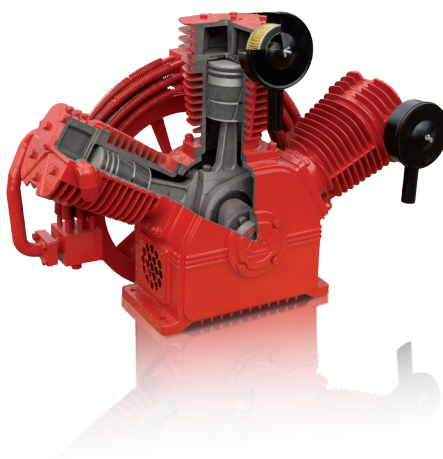

Choose from a range of genuine, high quality accessories to enhance the function, performance or protection of your Airmac air compressor. These practical and specialized accessories have been extensively developed in accordance with Airmac's rigorous standards to ensure perfect fit and operation.



**12V Battery Kit SM**



**12V Battery Kit LG**

<b>Battery Capacity CCA</b>	145 Amps	320 Amps
<b>Battery Type</b>	Sealed, Maintenance Free	Sealed, Maintenance Free
<b>Suit Honda Engine</b>	GX160 & GX200	GX270 & GX390
<b>Suit Yanmar Engine</b>	L48	L70 & L100
<b>Product Code</b>	AM 12V BKSM	AM 12V BKLG



**Cover**

<b>Cover Material</b>	UV Stabilized PVC
<b>Fastening</b>	2 Adjustable Buckle Straps
<b>Applications</b>	Mobile and Stationary
<b>Suit Tank Volume</b>	60, 70, 100 & 120 Litres
<b>Product Code</b>	AM CC903644



**Vibration Isolator Kit**

<b>Isolator Material</b>	Rubber
<b>Capacity</b>	800 kg Total
<b>Applications</b>	Mobile and Stationary
<b>Suit Airmac Model</b>	All Pallet Foot-Mounted
<b>Product Code</b>	AM RVI KIT

**Touch Up Paint**

<b>Application</b>	Aerosol Spray Pack
<b>Colour</b>	Airmac Fusheng Red
<b>Size</b>	400 ml
<b>Paint Type</b>	Quick Drying, CFC Free
<b>Product Code</b>	NN T5093S-400



